


MODEL 1235

REMOVABLE FACE


PERFORATED SUPPLY

STANDARD INDUSTRY TOLERANCES APPLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

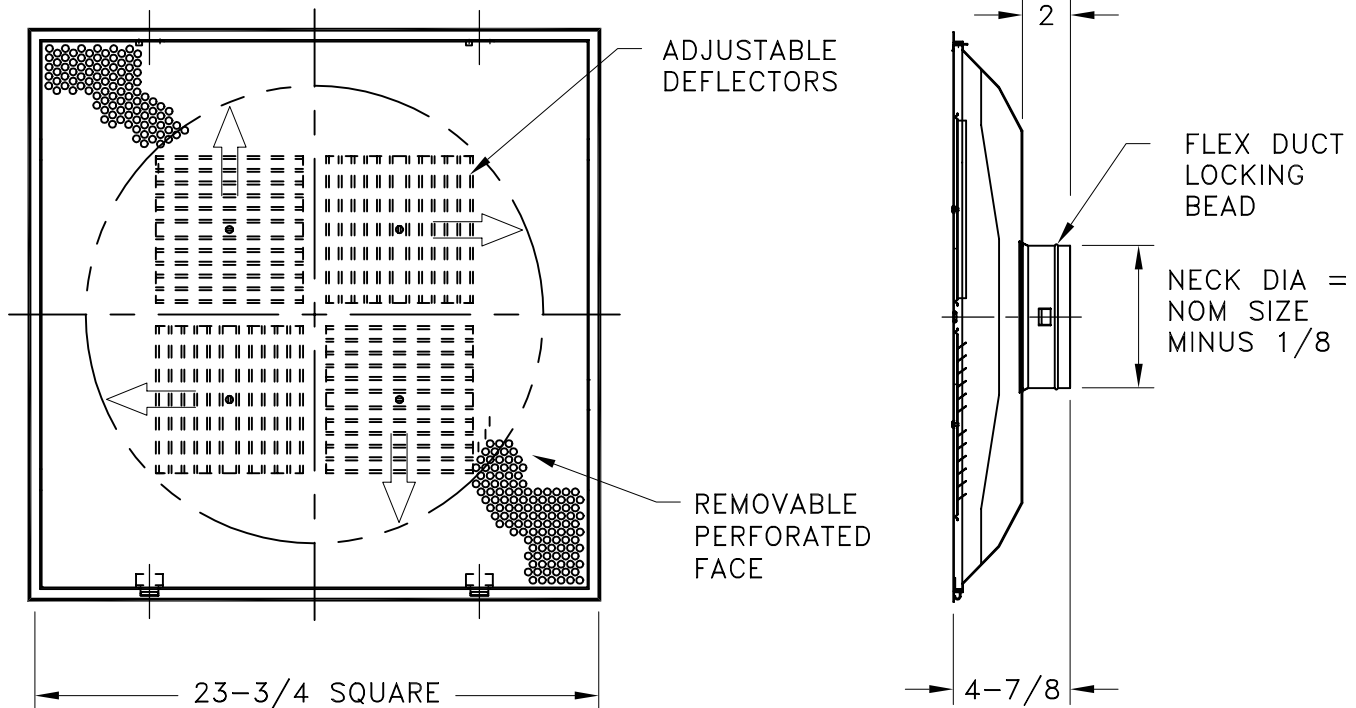

FACE DETAIL

PERFORATED - 3/16 INCH HOLES
ON 1/4 INCH
STAGGERED CENTERS,
51% FREE AREA



Mode 1235 diffusers have a hinged /latched face to access deflector and damper. Face mounted deflectors can be adjusted. Steel construction. Earthquake tabs are standard. Standard finish is white.

PROJECT: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

LOCATION: _____



J&J REGISTER
AIR DISTRIBUTION PRODUCTS